

# LOW-INLET P-TRAP WITH ESCUTCHEON

## »» 240 SERIES

### SPECIFICATION

Sioux Chief 240 Series brass tubular low-inlet p-trap shall be installed where necessary in plumbing systems. P-trap shall provide a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system when installed in a properly vented DWV system. Trap shall include shallow escutcheon and die-cast nuts. IAPMO Listed. Designed in accordance with ASME A112.18.2.

### MATERIALS

**Tubular:** Chrome-plated brass

**Nuts:** Chrome-plated zinc


### DIMENSIONS

	-01539C04	-01639C04
<b>A:</b> Length	10-1/2"	10-3/4"
<b>B:</b> J-bend height	2-15/16"	3-3/16"
<b>C:</b> Diameter	1-1/4"	1-1/2"
<b>D:</b> Gauge	17-ga	17-ga
<b>E:</b> J-bend width	3"	3-1/4"
<b>F:</b> Wall tube length	7-1/2"	7-1/2"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



240-01539C04

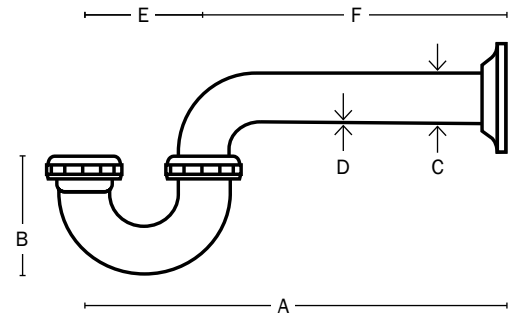

Create Item Number

**240-A**

e.g. **240-01539C04:** 1-1/4" chrome-plated brass, low-inlet p-trap with shallow escutcheon

#### TUBULAR DIAMETER **A**

**01539C04** = 1-1/4"

**01639C04** = 1-1/2"