

# ADJUSTABLE BRACKET

» 520-6 SERIES

WiderSlider™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief 520-6 series WiderSlider™ adjustable bracket shall be used where necessary to support drop-ear 90 fittings, tube clamps, tube straps and electrical boxes. All installations shall comply with local or national codes. Brackets shall be UPC IAPMO Listed. Bracket shall be corrosion resistant.

## MATERIALS

22 gauge G90 galvanized steel

## LOAD RATING



Maximum Load: 25 lbs.

## INSTALLATION

Bend tabs to accommodate 3/4", 1-1/2" or 2-1/8" depths from face of stud. Secure bracket within stud bay or floor joist with at least 4 screws (not included). Secure DE-90 elbow, pipe clamps, tube straps or electrical outlet boxes directly to bracket using self-tapping screws (not included).

## DIMENSIONS

	520-616	520-626
A: bracketing area length	9"-15"	13"-23"
B: bracket width	1-3/8"	1-3/8"
C: tab length	2.88"	2.88"
D: pilot hole spacing	0.203" on center	0.203" on center
E: pilot hole diameter	0.1"	0.1"

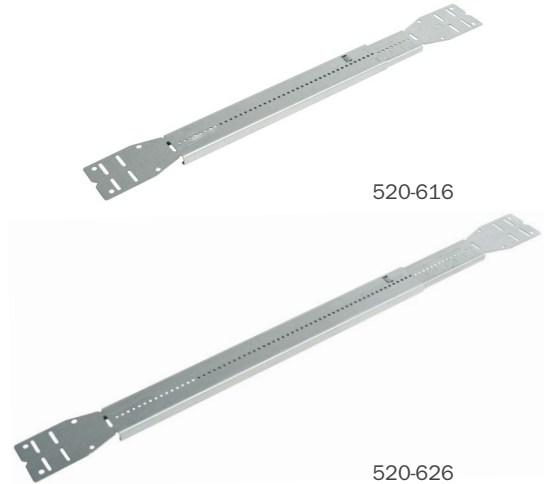

Made in USA

Create Item Number

### 520-6A6

e.g. 520-616: galvanized bracket for 16" stud bays with 9"-15" adjustability

#### BRACKET CONFIGURATION A

- 1 = Galvanized bracket for 16" stud bays with 9"-15" adjustability
- 2 = Galvanized bracket for 26" stud bays with 13"-23" adjustability