

# DOUBLE-DUTY DRIVE HOOK

» 555 SERIES

TwinTalon™

## SPECIFICATION

Sioux Chief's 555 TwinTalon™ CTS tube fasteners shall be used where necessary to secure CTS tube in piping system. Fastener shall be 100% corrosion proof and U.V. resistant. Fastener shall be impact resistant to 0°F, and be able to withstand continuous temperatures up to 160°F. Fastener shall include a pre-loaded rust-resistant, continuous ring shank nail and designed to avoid tube damage if nail is overdriven. Fastener shall be compatible with copper, PEX or CPVC tube.

## INSTALLATION

Snap onto 1/2" or 3/4" CTS tube. Be sure to follow spacing requirements of national and local plumbing codes.

## MATERIALS

**Fastener body:** UV-resistant, high density black polyethylene; 100% corrosion proof

**Nail:** #7 x 2 1/8" Zinc-plated, continuous ring shank

**Screw:** Rust resistant, zinc-plated Phillips pan head, self-drilling tip

## SAFE WORKING LOAD

21 lbs.

## SAFE WORKING TEMPERATURE


Impact resistance to 0°F

Maximum Temperature: 160°F (71°C)



## DIMENSIONS

A: Width	1.525"
B: Height	1.02"
C: Depth	0.4"
D: Tube size	1/2"-3/4" CTS

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

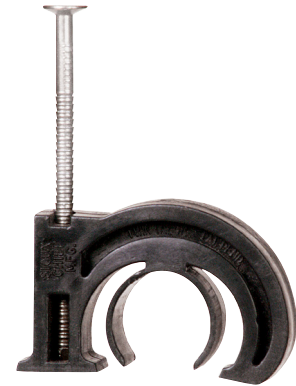

555-23

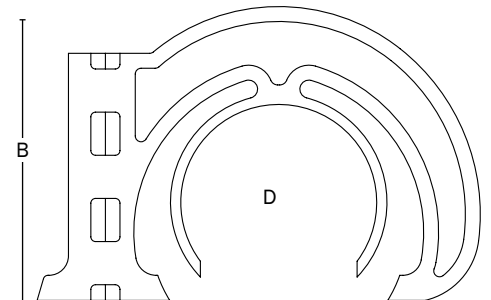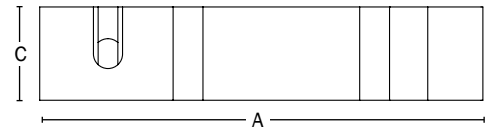

### Create Item Number

#### 555-23A

e.g. 555-23S: 1/2" CTS - 3/4" CTS TwinTalon with screw

#### FASTENER A

\_ = nail (leave blank)

S = screw