

HOT MOP SHOWER DRAIN

821 series

SPECIFICATION

Sioux Chief 821 Series shower drain shall be used for tile-floor showers where mopped asphalt/tar waterproofing will be applied. Two-piece drain body shall be enamel-coated cast iron. Upper half shall include stainless steel crown/ring and strainer. Strainer shall meet load and flow requirements. Lower half shall have 2" no-caulk or FIP thread connection. Drain halves shall bolt together with three stainless steel bolts/washers.

MATERIALS

drain body: cast iron
ring/strainer: stainless steel
no-caulk gasket: elastomer
compression nut: brass

STRAINER FREE AREA

2.21 in²


STRAINER FLOW CAPACITY (1/4" STANDING WATER)

4.78 gpm

DIMENSIONS

A: ring/strainer diameter: 3 1/2"
 B: elevation: 2 3/16"
 C: overall diameter 5 5/8"
 D: overall height
 no-caulk: 4 1/4"
 thread: 3 5/8"

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

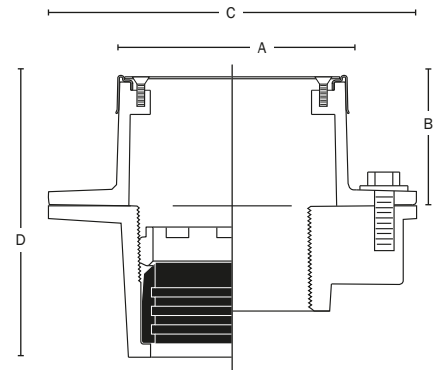

Create Item Number

821-2iA

e.g. 821-2iNS = Cast iron hot-mop shower drain with 2" no-caulk connection

- A CONNECTION**
- NS 2" no-caulk
 - FS 2" FIP thread

- ACCESSORIES**
- 821-HSR Stainless steel ring/strainer
 - 821-HPR Polished brass ring/strainer
 - 821-HSQ 4" Square stainless steel tile ring