ADJUSTABLE CLEANOUT WITH DECK FLANGE

>> 822 SERIES

Halo"

SPECIFICATION

Sioux Chief 822 series adjustable floor cleanout shall be used where necessary in drainage systems. Cleanout shall have an 18 gauge stainless steel deck/mounting flange and an enamel-coated ductile iron body with no-hub connection. Cleanout shall allow adjustment of 3/4" above the deck flange. Scoriated cleanout cover shall meet applicable load requirements for intended use. Cleanout body shall include a sealing plug with raised square head to prevent escape of sewer gas. Designed in accordance with ASME A112.36.2M.

MATERIALS

Ring/strainer: nickel-bronze, 301 stainless steel

Head adapter: ductile iron

Deck flange: 18-gauge 430 stainless

Sealing plug: elastomer gasket, polypro drive screw

Base adapter: ductile iron

COVER LOAD RATING

Nickel-bronze: 2,000 lbs. (light duty, pedestrian traffic) Stainless steel: 2,500 lbs. (medium duty, pedestrian traffic)

DIMENSIONS

3" No-hub A: Connection size

B: Ring/cover diameter


round / square 51/2" / 57/8" C: Flange diameter 91/2" D: Body diameter 5%" E: Body height 43/8"

F: Adjustable finish height

round / square 0" - 3/4" / 5/16" - 3/4"





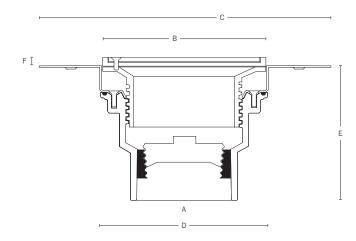

Create Item Number

822-AB

e.g. 822-C3DNRV: Adjustable no-hub cleanout with deck flange and round nickel-bronze cover with

A: COVER TYPE

☐ C3DNR = Round nickel-bronze

☐ C3DSR = Round stainless steel

☐ C3DSQ = Square stainless steel

□ **V** = Vandal-resistant cover screws

□ S = Stamping (specify letters)

☐ C3DNQ = Square nickel-bronze □ C = Carpet marker

B: OPTIONS

ACCESSORIES

822-EX3 Threaded extension adapter.

Extends head 13/4" (min) to 33/8" (max)

above deck flange