

# ADJUSTABLE CLEANOUT ROUGH-IN FIXTURE

» 834 SERIES

FinishLine™

## SPECIFICATION

Sioux Chief 834 Series FinishLine adjustable floor cleanout rough-in fixture shall be used where necessary in drainage systems. Fixture shall include a Coring Sleeve to allow adjustment before the concrete pour. Coring Sleeve shall include a Coring Plug designed to be replaced with a Finish Fixture at finish. Fixture shall have a ductile iron base adapter with No-Hub connection and slotted polypropylene or brass cleanout plug, situated in base adapter. Designed in accordance with ASME A112.36.2M.

## MATERIALS

**Coring plug:** high-impact polymer

**Coring sleeve:** Ductile iron

**Cleanout plug:** Polypropylene, brass

**Base adapter:** Ductile iron

## DIMENSIONS


<b>A:</b> Connection size	3", 4"
<b>B:</b> Overall diameter	6-7/8"
<b>C:</b> Base adapter height <sup>1</sup>	4-1/2"
<b>D:</b> Pre-pour adjustable height <sup>1</sup>	5-3/8" – 6-5/8"
<b>E:</b> Cleanout plug	3-1/2" slotted

1 add 5/16" for Push-Joint connection

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



834-4DF

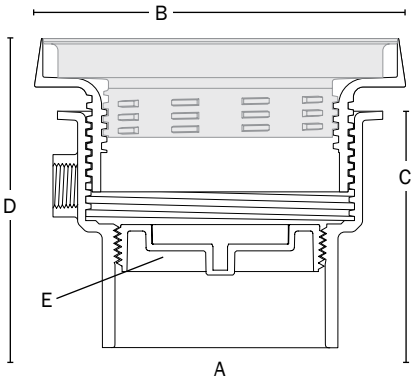

Create Item Number

**834-AB**

e.g. **834-4DFB:** FinishLine adjustable cleanout rough-in fixture with 4" No-Hub connection and brass plug

### CONNECTION SIZE A

**3DF** = 3" No-Hub

**63DF** = 3" Push-Joint

**4DF** = 4" No-Hub

**64DF** = 4" Push-Joint

### OPTIONS B

**B** = Brass cleanout plug  
in lieu of polypro (standard)

### Accessories - Available Separately:

832-P: Coring Plug / cleanout plug wrench

832-W: Flexible locating bristles kit