

# ADJUSTABLE FLOOR DRAIN WITH SQUARE CAST IRON GRATE

## » 862 SERIES

### SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable square cast iron top with secured, heel-resistant and vandal-resistant grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in warehouses, mechanical rooms, parking garages, and other areas with heavy-duty traffic.

### MATERIALS

**Drain body:** cast iron

**Clamping collar:** cast iron


**Head/grate:** cast iron

### LOAD RATING

Extra Heavy-duty (7,500 - 10,000 lbs). Heel-resistant

### DIMENSIONS

<b>A:</b> Connection size (No-Hub)	2", 3", 4"
<b>B:</b> Top diameter	9"
<b>C:</b> Strainer adjustment	1.55" - 2.55"
Strainer free-area	24.0 in <sup>2</sup>

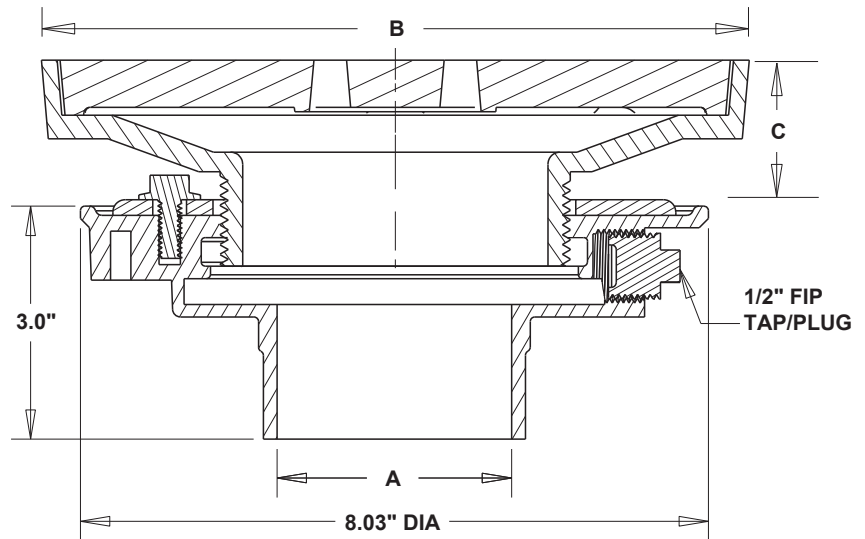

Create Item Number

### 862-ABC

e.g. **862-239IQB:** Floor drain - 3" No-Hub connection, square cast iron head/strainer with debris bucket

#### CONNECTION TYPE **A**

- 2** = No-Hub outlet
- 6** = Push-Joint outlet

#### CONNECTION SIZE **B**

- 29IQ** = 2"
- 39IQ** = 3"
- 49IQ** = 4"

#### OPTIONS **D**

- B** = Debris bucket
- E** = Drain head extension adapter<sup>1</sup>
- 9** = Side-outlet connection<sup>2</sup>

1: Cast iron - MIP x FIP thread | 2: For 3" and 4" No-Hub connection only