

# ADJUSTABLE FLOOR DRAIN - SQUARE TOP

## 862 SERIES

### SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable square stainless steel top with vandal-resistant/heel-resistant, secured grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

### MATERIALS

**Drain body:** cast iron

**Clamping collar:** cast iron

**Head/strainer:** 304 stainless steel


### LOAD RATING

5,500 lbs.

### DIMENSIONS

<b>A:</b> Connection size	2", 3", 4"	
<b>B:</b> Top diameter	5-3/8"	6"
<b>C:</b> Strainer adjustment	1.6" - 2.4"	1.6" - 2.4"
Strainer free-area	10.0 in <sup>2</sup>	13.3 in <sup>2</sup>

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

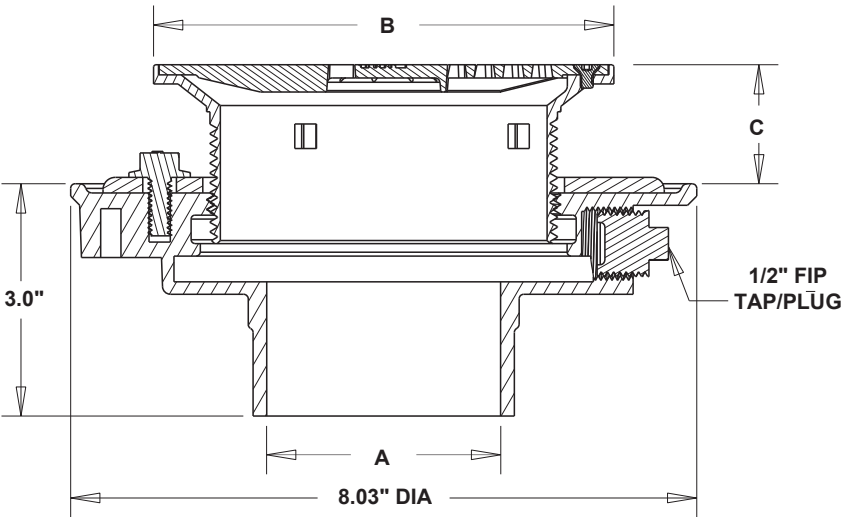

### Create Item Number

### 862-ABCD

e.g. **862-236SQB:** Floor drain - 3" No-Hub connection, 6" square SS head/strainer with debris bucket

#### CONNECTION TYPE **A**

- 2** = No-Hub outlet
- 6** = Push-Joint outlet

#### CONNECTION SIZE **B**

- 2** = 2"
- 3** = 3"
- 4** = 4"

#### STRAINER DIAMETER **C**

- 5SQ** = 5-3/8" square
- 6SQ** = 6" square

#### OPTIONS **D**

- B** = Debris bucket
- E** = Drain head extension adapter<sup>1</sup>
- 9** = Side-outlet connection<sup>2</sup>

1: Cast iron - MIP x FIP thread | 2: For 3" and 4" No-Hub connection only