

# TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

## SPECIFICATION

Sioux Chief 865 Series ductile iron cross-slot grating shall be used where necessary with FastTrack trench drain channels. Grating shall be approved for use in heavy-duty applications and parking areas with truck/vehicle traffic at less than 15 mph. Grating shall have decorative/ADA pattern and fasten to anchors with screws.

**ADA Compliant:** Yes

**Heel-Resistant:** Yes<sup>1</sup>

**Load Rating:**

DIN EN 1433: Class C250<sup>2</sup>

ASME A1122.6.3: Heavy Duty

## MATERIALS

**Grate:** Ductile iron

**Screws:** nickel-plated brass

## FREE AREA

64.0 in<sup>2</sup>


## DIMENSIONS

<b>A:</b> Length	36"
<b>B:</b> Width	6"
<b>C:</b> Thickness	3/4"
<b>D:</b> Slot length	5"
<b>E:</b> Slot opening	5/16"

<sup>1</sup> Per ASME A112.6.3 requirements

<sup>2</sup> Grate can be installed with or without ductile iron grate frame (865-F)

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

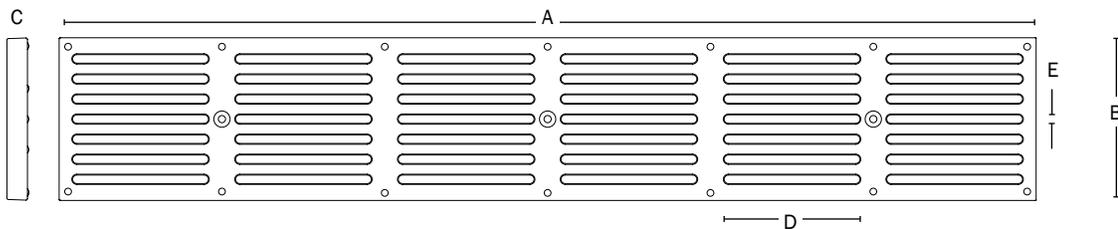

Item Number

**865-GiC**