

CLOSET FLANGE

»» 887 SERIES

SPECIFICATION

Sioux Chief 887 series closet flanges shall be installed where necessary in drainage systems. Closet flange shall be fastened to floor and have a full-swivel, corrosion-resistant stainless steel ring with slots for fastening closet bolts to flange ring. Flange shall have a 3" Sch. 40 hub connection which conforms to ASTM D2665 (PVC) or D2661 (ABS) and be designed for solvent weld connection inside 4" Sch. 40 pipe¹. Closet flange shall be UPC listed.

MATERIALS

Flange body: PVC, ABS

Flange ring: 430 Stainless steel

INSTALLATION

Always fasten flange to floor, using screws in holes on both sides of the slot or notch that will be used for the closet bolts. Solvent weld over or inside¹ Sch. 40 ABS/PVC DWV pipe according to glue manufacturer's instructions. Test for leaks before use.

DIMENSIONS


A: Connection	3" Sch. 40 Hub ¹
B: Overall height	2.75"
C: Flange diameter	7.00"
D: Screw centers	6.09"
E: Flange height	0.32"
E: Hub depth	1.875"

¹ Connection is designed to fit inside most, but may not fit all 4" Sch. 40 PVC/ABS

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



887-PM

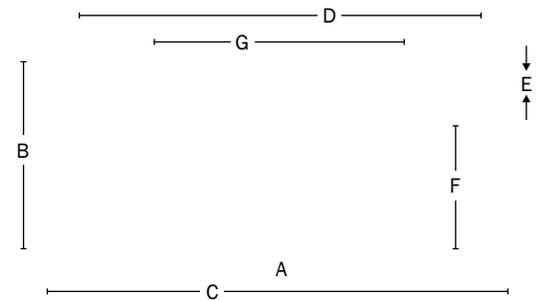

Item Number

887 SERIES CLOSET FLANGE

887-AM = ABS closet flange with swivel ring

887-PM = PVC closet flange with swivel ring