

OFFSET CLOSET FLANGE

» 889 SERIES

FullFlush™

SPECIFICATION

Sioux Chief 889 Series FullFlush closet flanges shall be installed where necessary in drainage systems. Flange shall allow 1.5" offset in any direction and have an inner diameter area properly sized to allow full 3" flow for complete drainage and clog resistance. Stainless steel swivel flange ring shall be secured to floor and provide slots for inserting closet bolts. Flange shall have a 3" Sch. 40 hub connection which conforms to ASTM D2665 (PVC) or D2661 (ABS). Flange shall be UPC listed.

MATERIALS

Flange body: PVC, ABS

Flange ring: 430 Stainless steel

DIMENSIONS

A: Connection	3" Sch. 40 Hub ¹
B: Overall height	4.25"
C: Offset	1.50"
D: Ring diameter	7.00"
E: Screw centers	5.96"
F: Hub depth	1.50"

¹ Connection is designed to fit inside most, but may not fit all 4" Sch. 40 PVC/ABS


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



889-POTM



889-AOM

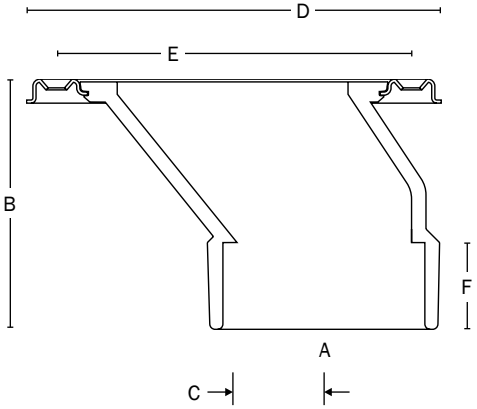

Create Item Number

889-AB

e.g. **889-POM**: FullFlush 3" PVC offset closet flange

CONNECTION TYPE A

AO = ABS Sch. 40 Hub

PO = PVC Sch. 40 Hub

KNOCKOUT OPTION B

M = Open - No knockout

TM = with TKO™ knockout