

BRASS BALL VALVE FOR F1960 PEX

▶▶ 648 SERIES

PowerPEX®

SPECIFICATION

Sioux Chief 648 series no-lead brass ball valves for ASTM F1960 PEX connection shall be used where necessary in water supply systems. Valves shall be designed with 1/4-Turn operation and blowout proof stem.

MATERIALS

Body: No-Lead Brass - DZR, SCC resistant¹

Seats: PTFE

Ball: Chrome-plated Brass

WORKING PRESSURE

400 WOG/PSI

Note: PEX connection specifications are limited to those called out in their respective ASTM standards for pipe and fittings.


DIMENSIONS

	1/2"	3/4"	1"
A: Overall length	2.60"	3.21"	4.00"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



648WG2FPPK1

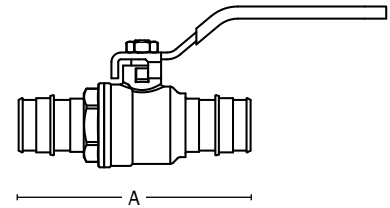

Create Item Number

648WGA

e.g. 648WG2FPPK1: 1/2" F1960 ball valve

CONNECTION A

2FPPK1 = 1/2" Standard Port Valve

3FPPK1 = 3/4" Standard Port Valve

4FPPK1 = 1" Standard Port Valve

¹ Material is dezincification and SCC resistant, and compliant with NSF-61 Annex G (California No Lead Plumbing Law)