

PRESSURE RELIEF VALVE

»» 687 SERIES

SPECIFICATION

Sioux Chief 687 series no-lead brass pressure relief valves with IPS thread connection shall be used where necessary in water supply systems. Valves shall provide fully automatic temperature and pressure relief protection for hot water heaters and storage tanks.

Designed in accordance with ANSI Z21.22/CSA 4.4

MATERIALS

Body: No lead brass¹

Stem: Stainless steel

Spring washer: No lead brass¹

Spring: Stainless steel

Bonnet: No lead brass¹

Handle: Steel

RELIEF SETTING

150 PSI

DIMENSIONS

A: Inlet connection 3/4" MIP thread


B: Outlet connection 3/4" FIP thread

C: Overall height 2.60"

D: C/L to outlet face 1.18"

¹ C46500 material is dezincification and SCC resistant, and compliant with NSF-61 Annex G (California No Lead Plumbing Law)

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____
TAG	_____

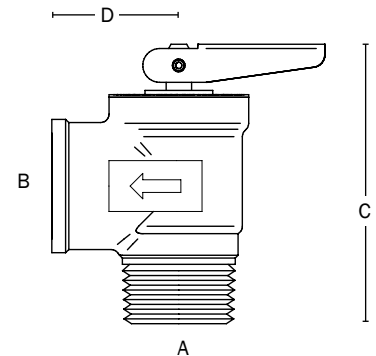

Item Number

687-PVLV