

WASHING MACHINE OUTLET BOX WITH SECONDARY SHUTOFF

» 696 SERIES

OxBox™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 696 OxBox™ shall be used in residential or commercial plumbing supply/drainage systems. Unit shall accommodate supply lines from above or below. Unit is designed to be secured directly over vertical stud using box clip or between studs using galvanized bracket (provided). When necessary, each box may be installed in separate stud bays. Supply box shall include 1/4-turn MIP/FSWT valves with integral, slotted shutoff. Drain box design shall include 5/8" integral test nipple with knock out. Outlet connections shall be 3/4". Every unit shall include debris cover for protection during rough-in.

INSTALLATION

Each two-box outlet box assembly includes box clip and adjustable bracket. Fasten box clip to each box then install directly over vertical stud (recommended) or use bracket and install within the same stud bay. Insert bracket through molded channel on box. Secure bracket to structure and box with screws (not provided). Mounting tabs with holes located on sides of box allows boxes to be installed directly to a stud. Boxes may be stacked as an alternative installation. Minimum space requirement between boxes is 1 3/4".

MATERIALS

- Outlet box:** ABS
- Frame:** fire-rated ABS
- Valve body:** chrome-plated forged brass
- Valve platform:** ABS
- Bracket:** galvanized steel, 18-ga.
- Box clip:** galvanized steel, 18-ga.

CERTIFICATIONS/APPROVALS


IAPMO listed
Valves meet ASME A112.18.1

VALVE/ARRESTER WORKING LIMITS

- Max working temperature:** 250°F
- Max testing air pressure:** 100 PSIG
- Max working/testing water pressure:** 250 PSIG

DIMENSIONS

- | | |
|-------------------------|---|
| A: frame width | 11 1/2" |
| B: frame height | 7 1/4" |
| C: frame opening width | 3 5/8" |
| D: frame opening height | 5 1/8" |
| E: rough-in box width | 4" (single box) or 10" (double with clip) |
| F: rough-in box depth | 3 1/2" |
| G: rough-in box height | 5 1/2" |
| H: supply connection | 1/2" nominal or 2" O.C. |
| I: drain connection | 2" DWV |

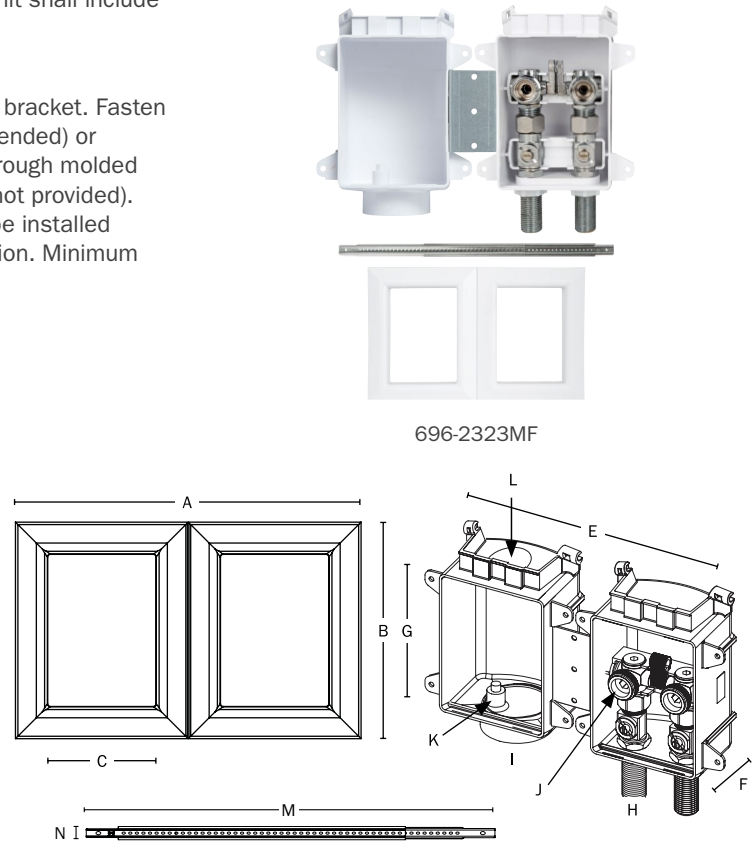

- | | |
|---------------------------------|--------------------------------------|
| J: outlet connection | 3/4" male hose thread |
| K: test nipple | 5/8" O.D. |
| L: secondary drainage knockout† | funnel accepts 1/2", 3/4" or 1" pipe |
| M: bracket length | 18" |
| N: bracket width | 5/8" |



Create Item Number

696-2323MA

e.g. **696-2323MF**: washing machine supply and drain box with MIP/FSWT valve with secondary shut-off and frame

FRAME OPTION A

- F** = standard pack (supply and drain box, frame, bracket, debris cover)
- R** = rough-in pack (supply and drain box, bracket, debris cover)

Available separately:
Frame only: (696-2F)
†Secondary drainage funnel: (696-CF)