


# FastTrack™

## Job Sketch Request Form

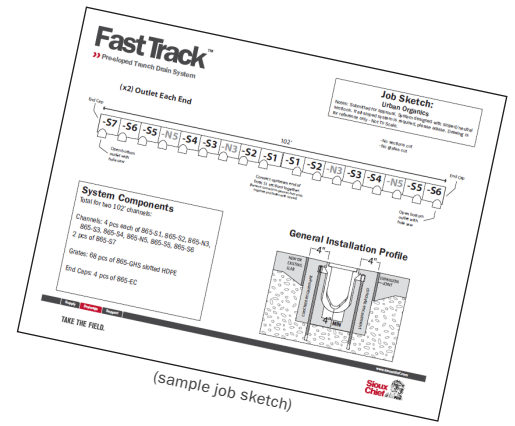

(sample job sketch)

Project Name: \_\_\_\_\_

Contact: \_\_\_\_\_

Phone/Email: \_\_\_\_\_

Overall Length: \_\_\_\_\_

For multiple systems, indicate individual channel lengths


- Length is critical - do not adjust     Length can be optimized to use full-length sections

### Slope Pattern:

- Slope to One End - Bottom Outlet  
 Slope to One End - Side Outlet




- Slope to Center - Single Bottom Outlet




- Neutral (no slope) - Bottom Outlet

- Slope to Each End - Bottom Outlet  
 Slope to Each End - Side Outlet




- Slope to Multiple Bottom Outlets (indicate number of outlets)




- Neutral (no slope) - Side Outlet


### Grate Type:




- Ductile Iron - Slotted  
 For loads up to Class C, or Class D with iron frame.




- Ductile Iron - Cross-slot  
 For loads up to Class C. (ADA)




- Ductile Iron - Diagonal Slot  
 For loads up to Class C. (ADA/heel-proof)



- Galvanized Steel - Slotted  
 For Class A loads.




- Galvanized Steel - Perforated  
 For Class A loads. (ADA/heel-proof)




- Stainless Steel - Diagonal Slot  
 For Class A loads. (ADA/heel-proof)


- Ductile Iron Grate Frames




- Reinforced Galvanized Steel - Slotted  
 For loads up to Class C.




- Stainless Steel - Slotted  
 For Class A loads.




- Stainless Steel - Perforated  
 For Class A loads. (ADA/heel-proof)



- Reinforced Stainless Steel - Slotted  
 For loads up to Class C



- HDPE - Slotted  
 For Class A loads



- GFPP - Cross-slot  
 For Class A loads. (ADA/heel-proof)

- Stainless Steel Edge Guards

### Special Notes/Instructions:

Use the area below to provide a drawing of the system if needed