


# PipeTitan™

## »» Universal Bracketing System

Specifications	
Standard Green Bracket (570 series)	ABS, U.V. stabilized
Standard Clamp & Strap	Natural high-density polyethylene
Flame Retardant Red Bracket, Clamp & Strap (572 series)	Flame retardant ABS, UL-94 VO
Screws	Zinc coated steel, $\frac{5}{16}$ " hex/Phillips head, 2" (strap) and 4" (clamp)
Stainless Steel Bands	300 series stainless steel: $\frac{1}{2}$ " wide $\times$ .025, 5" band = 4" max diameter, 7" band = 6" max diameter Screw: 410 series stainless, slotted/hex head

### Safe Working Load

$\frac{1}{2}$  failure load at 72°F

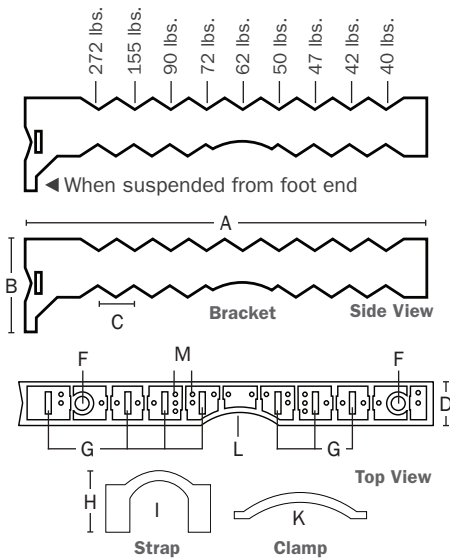

- A – 11"
- B – 2½"
- C – 1" O.C.
- D – 1¼"
- E – 1⅛"
- F – 1⅜"
- G – ⅞"
- H – 1¼"
- I – holds ⅝" O.D. – 1" O.D.
- J – ⅜"
- K – holds ⅜" O.D. – 3½"
- L – 1¾"
- M – holes for screws

### Installation Instructions

- Secure bracket to wall, stud or vent pipe with stainless steel band or clamp.  
Or, suspend bracket overhead using two  $\frac{3}{8}$ " threaded rods.
- Insert 2 screws into each strap.
- Install strap(s) into bracket channel and push down. Tighten screws securely.

⚠ **WARNING:** Cancer and Reproductive Harm

⚠ **ADVERTENCIA:** Cáncer y Daños Reproductivos

⚠ **ADVERTISSEMENT:** Cancer et effets néfastes sur la reproduction

[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

#IS-PIPETITAN 8-19

Supply

Drainage

Support

Specialties

[www.siouxchief.com](http://www.siouxchief.com)

14940 Thunderbird Road  
Kansas City, MO 64147  
P 1.800.821.3944  
F 1.800.758.5950



# PipeTitan™

## »» Universal Bracketing System



- Patent # 5,303,877
- Non-metallic—no electrolysis worries
- Helps isolate pipe and reduce noise
- Compatible with copper, PEX and CPVC



**Bracket**



**Clamp**



**Strap**



**Band**

THIS BAG CONTAINS:	KIT #	FLAME RETARDANT	KIT CONTENTS				UPC BAR CODE
			BRACKET	STRAP	CLAMP	BAND	
	570-10		1	2	1	0	
	570-20		1	2	1	1(5")	
	570-22		1	2	1	1(5") snap lock	
	570-24		1	2	1	1(7") snap lock	
	572-20	✓	1	2	1	1(5")	
	572-22	✓	1	2	1	1(5") snap lock	
	572-24	✓	1	2	1	1(7") snap lock	

\*Red flame retardant models comply with UL94-V0.

Supply

Drainage

Support

Specialties

[www.siouxchief.com](http://www.siouxchief.com)

**TAKE THE FIELD.**

